

100kW HYBRID INVERTER / 215kWh BATTERY

Air Cooling Commercial & Industrial Energy Storage System

Flexible

Highly integrated
All pre-assembled
Extendable

Reliable


DC electric circuit safety protection
Multi level battery protection
Fire suppression system

Efficient

Intelligent cooling system
＜10ms Switching Off / On-grid

Smart

Intelligent cloud platform management, real-time monitoring of operational status

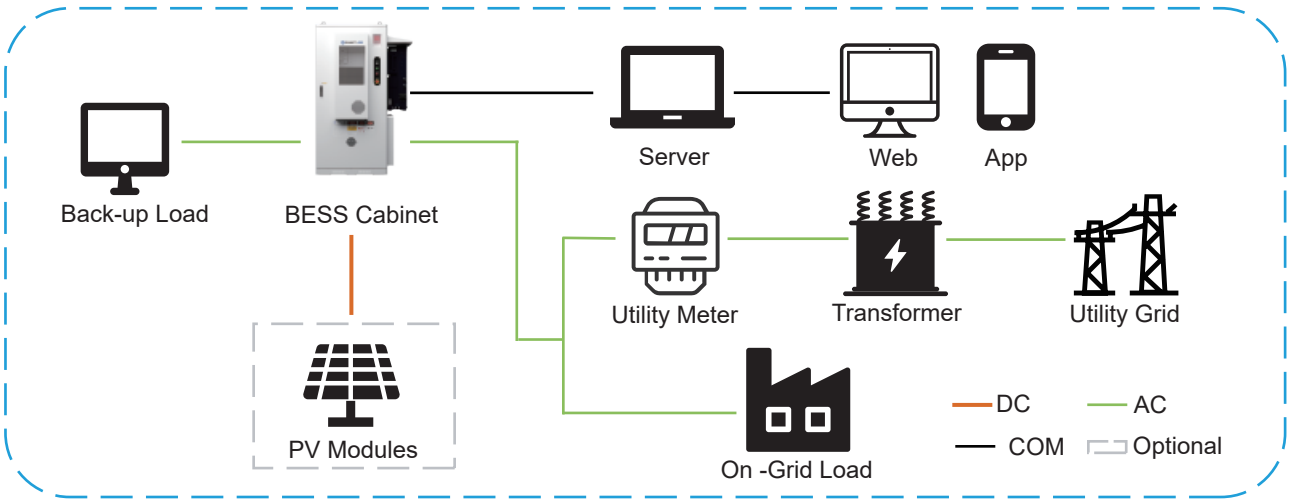


SUNKET-ESS

SUNKET-ESS

100kW HYBRID INVERTER / 215kWh BATTERY

Air Cooling Commercial & Industrial Energy Storage System

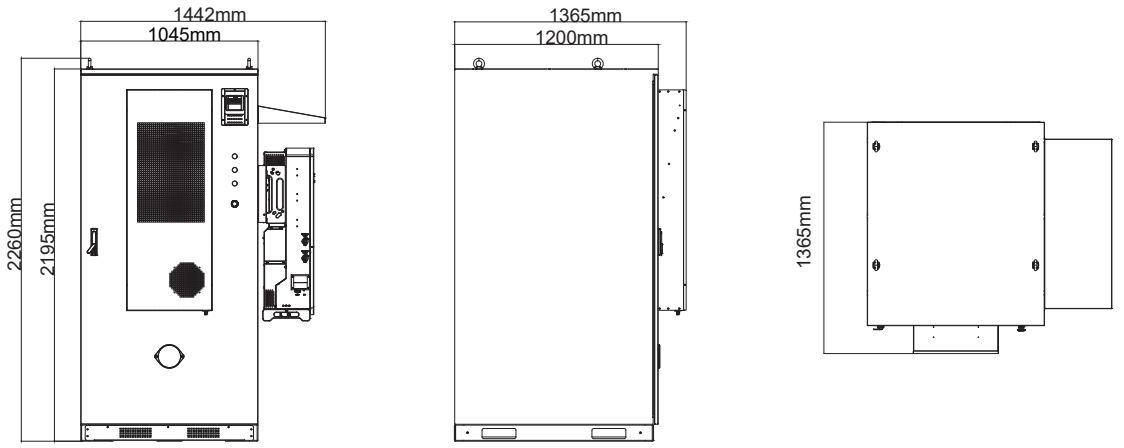

	Model	SKTESS215-100K
Battery	Battery Type	LiFePO4
	Cell Capacity	280Ah
	Pack Configuration	1P16S*15
	Nominal Capacity	215.04kWh
	Nominal Voltage	768V
	Operating Voltage Range	672~ 852V
	Max.Continuous Charge / Discharge Current	140A
	Charge / Discharge Rate	0.5C
	Cycle Life	Cycle Life ≥ 6000 / 5 Years (@25°C ± 2°C , 0.5C / 0.5C, 70% EOL)
PV	Max.DC Input Voltage	1000V
	MPPT Voltage Range	180 ~ 850V
	DC Inputs	2 / 2 / 2 / 2 / 2 / 2 / 2 / 2
	Max.Input Current	40A*8
Back-up	Rated Output Power	100kW
	On / Off-grid Switching Time	＜10ms
	Peak Output Apparent Power	155kW, 10s
System	Max. AC Output Power	110kW
	Grid Type	3W+N+PE or 3W+PE
	AC Output Frequency	50 / 60HZ
	AC Output Voltage	380 / 400V
	Voltage Harmonic Distorion	<3% @Linear Load
	AC Max. Output Current	167.2A
	Power Factor	0.8 Leading … 0.8 Lagging
	Ingress Protection	IP54
	Anti-Corrosion Grade	C4
	Max. System Efficiency	88%
	Operating Environment Temperature	-20℃~50℃
	Relative Humidity	5~95 % (non-condensing)
	Max. Working Altitude	3000(＞2000m derating)
	Communication	CAN / RS485 / WiFi / LAN (Optional)
	Cooling	Air Cooling
	Dimension	1442 × 1365 × 2195mm
	Net Weight	≤2100kg
	Max. Parallel	5

Specifications are subject to change without further notification
SKT-EN-2026V1.0 ©Copyright 2026 Sunket