

241kWh BATTERY

Air Cooling Commercial & Industrial Battery System Solution

Flexible

Highly integrated
All pre-assembled
Extendable

Reliable


DC electric circuit safety protection
Multi level battery protection
Fire suppression system

Efficient

Intelligent cooling system
Higher system efficiency

Smart

State monitoring and faults record
Battery performance monitoring and logging

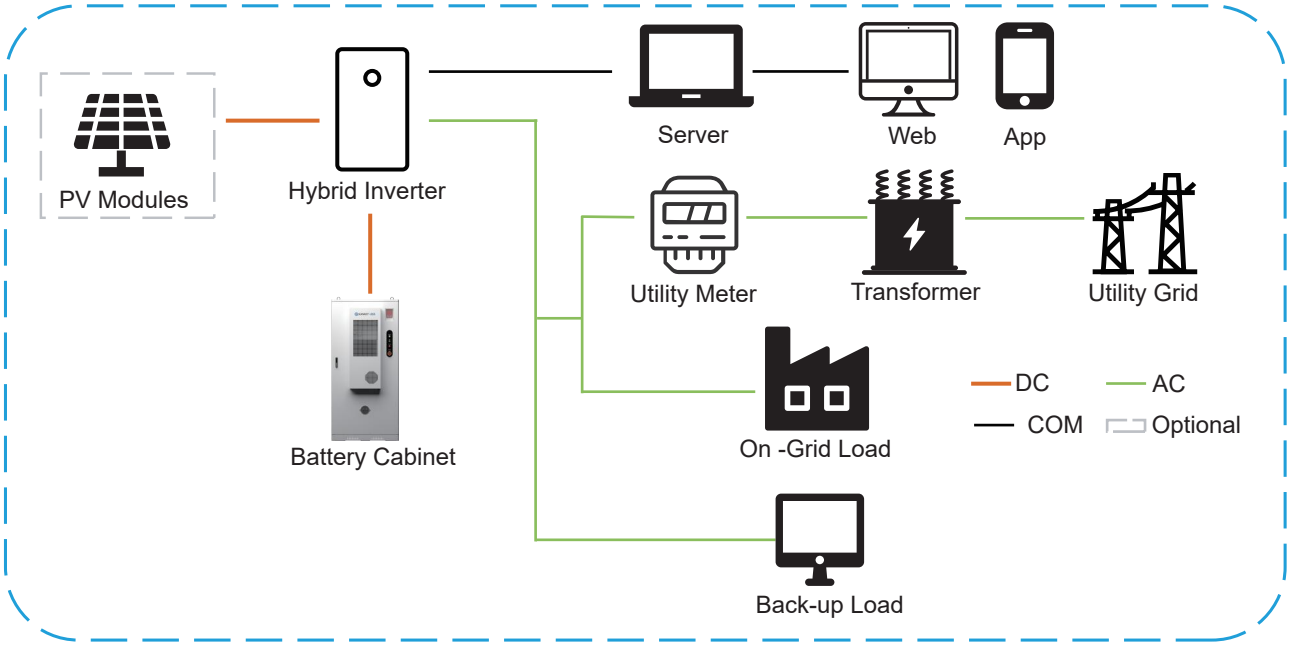


SUNKET-ESS

SUNKET-ESS

241kWh BATTERY

Air Cooling Commercial & Industrial Battery System Solution

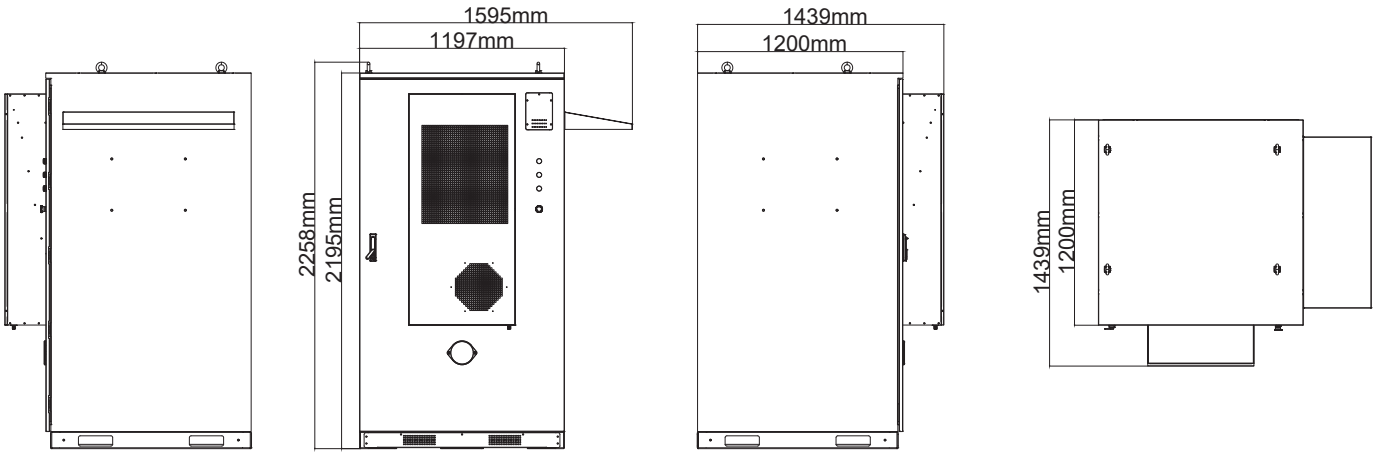

Unit:mm

SKTESS241

Cell Capacity	314Ah
Nominal Battery System Energy	241kWh
Nominal Battery System Voltage	768Vdc
Battery System Working Voltage Range	672~ 852Vdc
Rated Output Power	125kW
Max. AC Output Power	137.5kVA
THDi	<3% (at nominal power)
Nominal Grid Voltage	400V, 3L + N + PE
Nominal Grid Frequency	50 / 60Hz
Power Factor Range	0.8 leading ... 0.8 lagging
Weight	2000kg
Dimension(W×D×H ,mm)	1595 × 1439 × 2195mm
IP Protection	IP54
Anti-corrsion Level	C3
Max. Operation Altitude	＜2000m
Charging Temp. Range	0 ~ 45℃
Discharging Temp. Range	-20 ~ 50℃
Operation Humidity Range	5 ~ 95 % (non-condensing)
Communication Port	CAN / RS485
Complance	IEC61000；IEC62619；IEC62477；EN50549
Expansion	Max.4 cabinets connected in parallel

* Subject to actual delivery

sunket.com

sales@sunket.cn

Specifications are subject to change without further notification

SKT-EN-2025V1.0 ©Copyright 2025 Sunket