

LFP 3000 / HV

57.6V 50Ah Each block

RECHARGERABLE LITHIUM BATTERY


- High inverter compatibility
- Home Automation
- >15 Years life span
- Reliable LFP cells
- WiFi Communication
- Cells cycle times 6000 cycles
- CANbus standard connection
- IP54 Rating Triple hardware protection
- Smart BMS system to optimize the performance


TÜV SÜD CE UN 38.3


SUNKET®-ESS

SUNKET®-ESS

LFP 3000 / HV
57.6V 50Ah

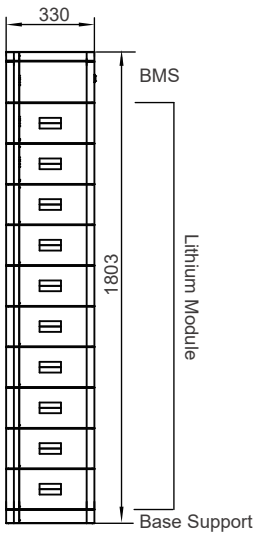

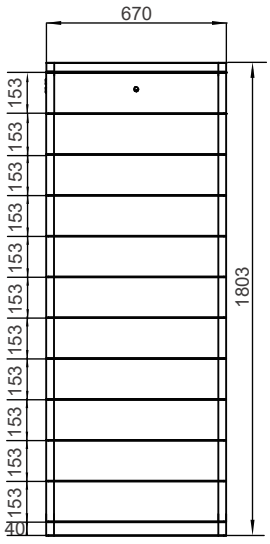

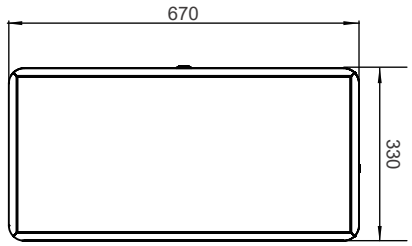

Min Capacity: 3 Lithium Modules & BMS
Max Capacity: 10 Lithium Modules & BMS

Electrical Characteristics

Module Type	LFP 9kWh/HV	LFP 12kWh/HV	LFP 15kWh/HV	LFP 18kWh/HV	LFP 21kWh/HV	LFP 24kWh/HV	LFP 27kWh/HV	LFP 30kWh/HV
Nominal Capacity (at 25°C)	8.64kWh	11.52kWh	14.40kWh	17.28kWh	20.16kWh	23.04kWh	25.92kWh	28.80kWh
Usable Capacity (90%DOD)	7.78kWh	10.37kWh	13.00kWh	15.55kWh	18.14kWh	20.74kWh	23.33kWh	25.92kWh
Battery Module	LFP 3000 / HV : 57.6V 50Ah							
Number of Modules	3	4	5	6	7	8	9	10
Nominal Voltage	172.8V	230.4V	288V	345.6V	403.2V	460.8V	518.4V	576V
Operating Voltage Ranges	135-197.1V	180-262.8V	225-328.5V	270-394.2V	315-459.9V	360-525.6V	405-591.3V	450-657V
Nominal Dis-/Charge Current	50 / 25A							
Max. Charge Voltage	197.1V	262.8V	328.5V	394.2V	459.9V	525.6V	591.3V	657V
Weight	102kg	131kg	160kg	189kg	218kg	247kg	276kg	305kg
Dimension(mm)	670*330*697	670*330*855	670*330*1013	670*330*1171	670*330*1329	670*330*1487	670*330*1645	670*330*1803
Certificates	CE,UN38.3,IEC62619,IEC63056,IEC62477							

Operating Condition	Indoor or outdoor
Operating Temperature Charge	0~55°C
Operating Temperature Discharge	-20~55°C
Humidity	Up to 90% (non-condensing)
Pollution Degree	3
Over Voltage Category	II
Cooling Type	Natural cooling
IP Rating	IP 54
Protective Class	I
Warranty	10 years
Life Span	>15 years
Communication Interface	CAN/WIFI
Protection Mode	Triple hardware protection
Battery Protection	Over-current/Over-voltage/Short-circuit/Under-voltage

Cooperation Partners

solis
Afore 艾伏
SOFAR SOLAR
GROWATT
SOLINTEG
INTEGRATE SOLAR INTELLIGENTLY
Deye
ThinkPower

sunket.com
sales@sunket.cn

Specifications are subject to change without further notification
SKT-EN-2024V1.0 ©Copyright 2024 Sunket