



125kW HYBRID INVERTER / 241kWh BATTERY

Air Cooling Commercial & Industrial Energy Storage System

Flexible

Highly integrated
All pre-assembled
Extendable

Reliable


DC electric circuit safety protection
Multi level battery protection
Fire suppression system


Efficient

Intelligent cooling system
< 10ms Switching Off /
On-grid

Smart

Intelligent cloud platform
management, real-time
monitoring of operational status

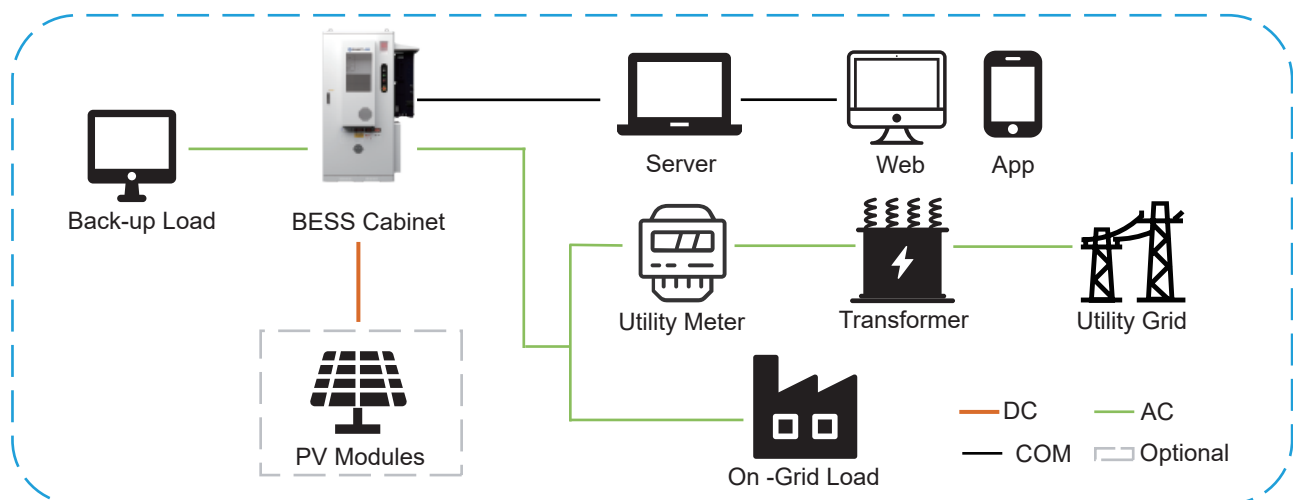

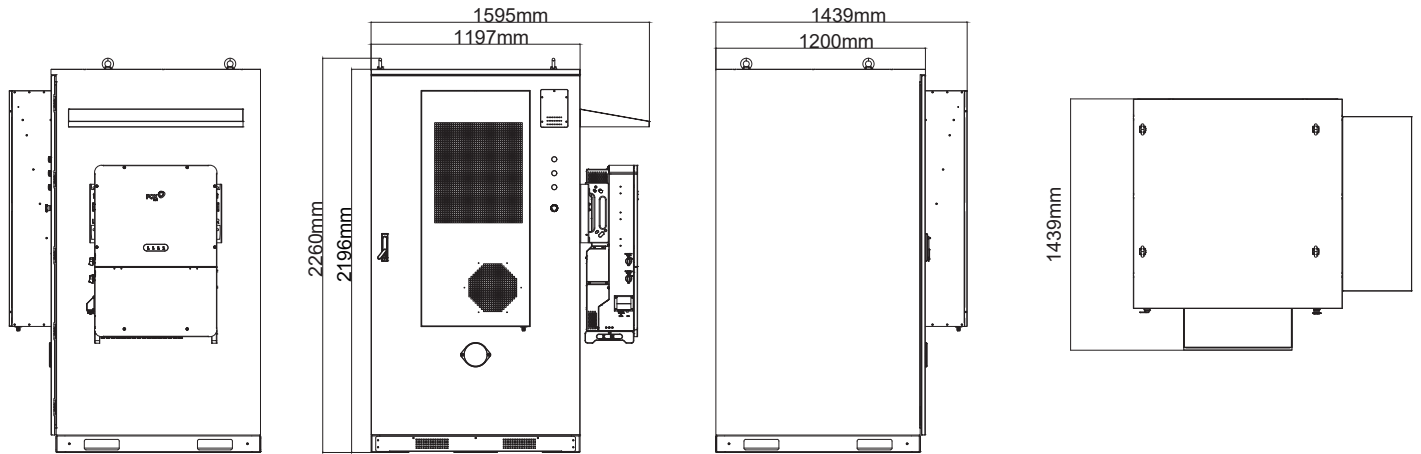

	Model	SKTESS241-125K
Battery	Battery Type	LiFePO4
	Nominal Capacity	314Ah
	Battery Configuration	1P240S
	Nominal Energy	241.152kWh
	Nominal Voltage	768V
	Operating Voltage Range	672~ 864V
	Max.Continuous Charge / Discharge Current	157A
	Charge / Discharge Rate	0.5P
	Max. Charge-discharge Efficiency	95% (@25°C~30°C, 0.5P)
	Cycle Life	≥ 6000(@25°C ± 2°C, 0.5P / 0.5P, 70% EOL)
PV	Max.DC Input Voltage	1000V
	MPPT Voltage Range	180 ~ 850V
	DC Inputs	2 / 2 / 2 / 2 / 2 / 2 / 2
	Max.Input Current	40A*8
Back-up	Rated Output Power	125kW
	On / Off-grid Switching Time	<10ms
	Peak Output Apparent Power	155kW, 10s
System	Max. AC Output Power	137.5kW
	Grid Type	3W+N+PE or 3W+PE
	AC Output Frequency	50 / 60HZ
	AC Output Voltage	380 / 400V
	Voltage Harmonic Distortion	<3% @Linear Load
	AC Max. Output Current	198.5A
	Power Factor	0.8 Leading ... 0.8 Lagging
	Ingress Protection	IP54
	Anti-Corrosion Grade	C4
	Max. System Efficiency	88%
	Operating Temperature Range	-20°C~50°C
	Relative Humidity	≤90 % (non-condensing)
	Max. Working Altitude	3000(>2000m derating)
	Communication	CAN / RS485
	Cooling	Air Cooling
	Dimension	1595 × 1439 × 2196mm
Net Weight	≤2100kg	
Max. Parallel	5	