







ULTRA
N TYPE

Fire Class A 

High Energy Performance 

Strengthened Mechanical Load 

Anti PID 

100% Inspection
25years Guarantee 


SMBB Technology
Half Cut N Type Cell 

SKT450~470M12-96D5

450~470 Watt


210x182mm 16BB 96Cells
N Type Mono Half Cell PV Module Series

Sunket N Type Linear Warranty

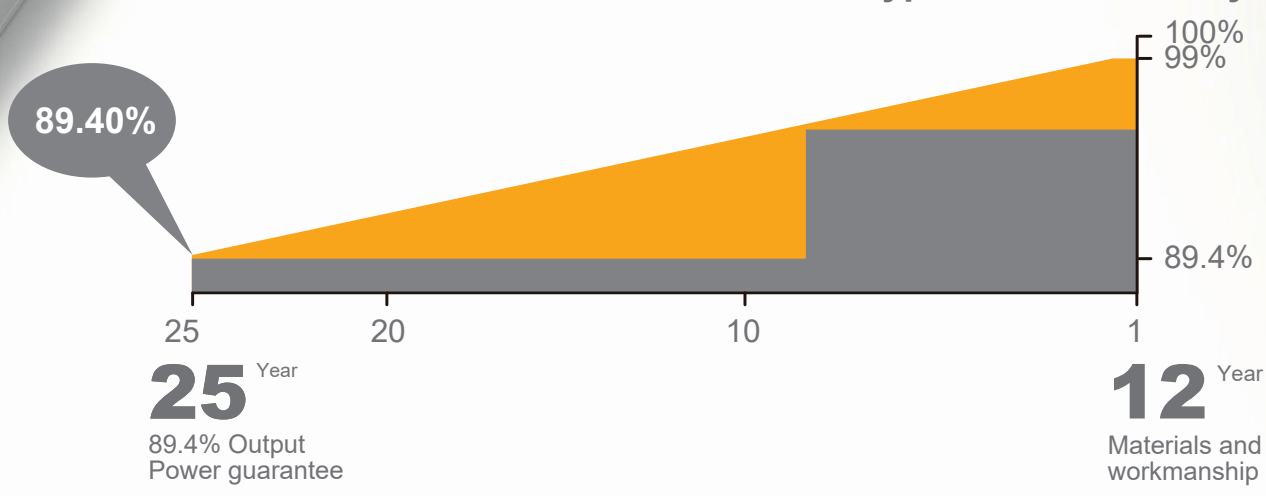

SKT450~470M12-96D5

210x182mm 16BB 96Cells
N Type Mono Half Cell PV Module Series

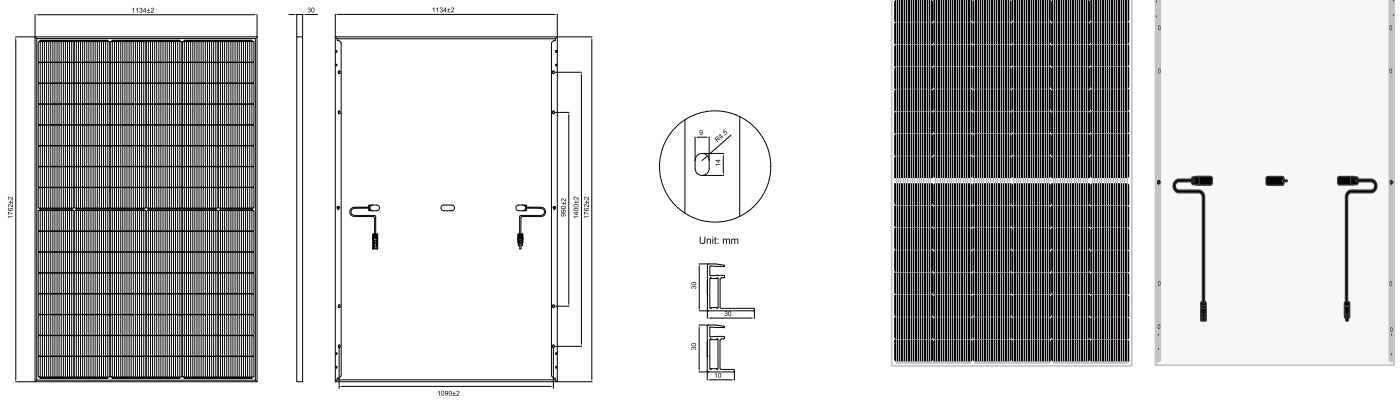

All Dimensions in mm
The above drawing is a graphical representation of the product.

Electrical Characteristics (STC/NMOT)

Module Type	SKT450M12-96D5		SKT455M12-96D5		SKT460M12-96D5		SKT465M12-96D5		SKT470M12-96D5	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Test Conditions	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power- Pmax(W)	450	339.8	455	343.5	460	347.4	465	351.2	470	355.0
Open Circuit Voltage - Voc(V)	35.64	33.92	35.80	34.11	35.97	34.30	36.14	34.49	36.31	34.68
Short- Circuit Current - Isc(A)	16.06	12.91	16.14	12.96	16.23	13.01	16.32	13.06	16.40	13.11
Voltage at Pmax -Vmp(V)	29.63	27.83	29.76	27.99	29.89	28.15	30.03	28.31	30.16	28.47
Current at Pmax - Imp(A)	15.19	12.21	15.29	12.27	15.39	12.34	15.49	12.40	15.58	12.47
Module Efficiency -ηm(%)	22.52	/	22.77	/	23.02	/	23.27	/	23.52	/
Power Tolerance(W)	(0, +5W)									
Maximum System Voltage(V)	1500Vdc (IEC / UL)									
Maximum Series Fuse Rating (A)	25A									

*STC : Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5
*NMOT : Irradiance 800W/m², Ambient Temperature 20°C, Air Mass 1.5, Wind Speed 1m/s
*Measurement tolerance: ±3% *Power binning up to: +3%

Mechanical Specifications

External Dimensions	1762×1134×30mm
Weight	21kg
Solar Cells	N-Type 16BB 182×105mm (2×48pcs)
Front Glass	AR Coated 3.2mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68
Output Cables	4.0mm ² , 1200mm (+),1200mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Temperature Characteristics

Pmax Temperature Coefficient	-0.290%/°C
Voc Temperature Coefficient	-0.250%/°C
Isc Temperature Coefficient	+0.045%/°C
Operating Temperature Range	-40~+85°C
Nominal Operating Cell Temperature(NMOT)	45±2°C

Packing Configuration

Pallet Dimensions	1790×1140×1254mm		
Ways of Transport	40'HQ	13.5m Flatbed Truck	17.5m Flatbed Truck
Pieces per Pallet	37 Pcs	36 Pcs	36 Pcs
Pallets per Container	26 Pallets	24 Pallets	36 Pallets
Pieces per Container	962 Pcs	864 Pcs	1296 Pcs

Current-Voltage & Power-Voltage Curves (SKT470M12-96D5)

