

RAL5009

SKT375M10 375 Watt

182mm 108Cells Blue-colored N Type Solar PV Module

N TYPE

SCAN CODE TO
WATCH VIDEO



Learn more about the
production of 182mm
Mono PV Solar Module



Blue-colored
glass and frame



Suitable for
blue roof buildings



PV facade with
innovative compositions



SMBB Technology
Half Cut N Type Cell



Anti PID



Excellent Low-light
Performance




100% Inspection
Guarantee Reliability





Strengthened
Mechanical Load

Sunket N Type Linear Warranty

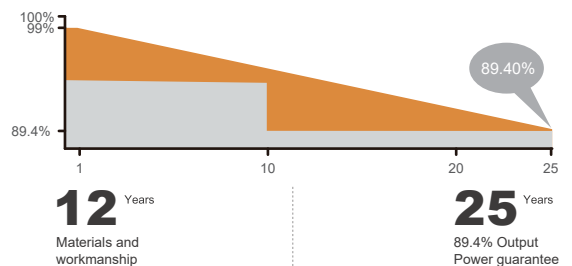

SUNKET - BIPV

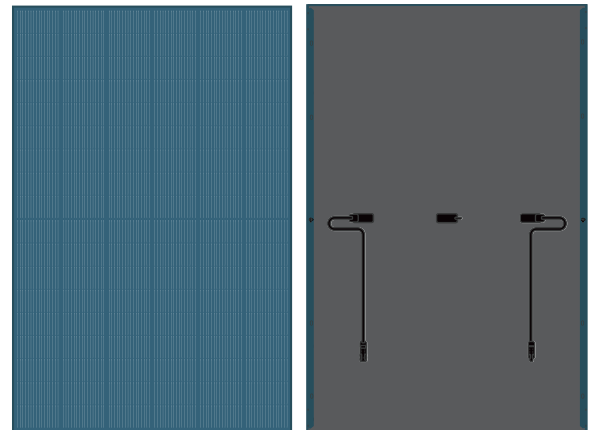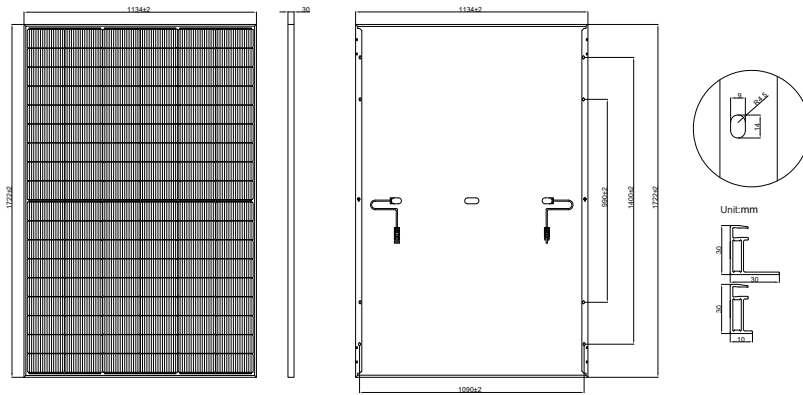

All Dimensions in mm
The above drawing is a graphical representation of the product.

Transparent backsheet is available.
Bifacial Solar PV Modules can be customized.

Electrical Characteristics (STC)

Module Type	SKT375M10
Test Conditions	STC
Maximum Power- Pmax(W)	375
Open Circuit Voltage - Voc(V)	38.73
Short- Circuit Current - Isc(A)	12.10
Voltage at Pmax -Vmp(V)	32.13
Current at Pmax - Imp(A)	11.66
Module Efficiency - η m(%)	19.20
Power Tolerance(W)	(0, +4.99)
Maximum System Voltage(V)	1500Vdc (IEC / UL)
Maximum Series Fuse Rating (A)	25A

*STC : Irradiance 1000W/m², Cell Temperature 25 C, Air Mass 1.5

*Measurement tolerance: \pm 3% *Power binning up to: +3%

Mechanical Specifications

External Dimensions	1722x1134x30mm
Weight	20.5kg
Solar Cells	Mono crystalline 182mm (2x54pcs)
Front Glass	AR Coated 3.2 mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68
Output Cables	4.0mm ² , 1200mm (+), 1200mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Packing Configuration

Pallet Dimensions	1750×1140×1254mm		
Ways of Transport	40'HQ	13.5m Flatbed Truck	17.5m Flatbed Truck
Pieces per Pallet	37 Pcs	36 Pcs	36 Pcs
Pallets per Container	26 Pallets	24 Pallets	36 Pallets
Pieces per Container	962 Pcs	864 Pcs	1296 Pcs

Temperature Characteristics

Pmax Temperature Coefficient	-0.290%/C
Voc Temperature Coefficient	-0.250%/C
Isc Temperature Coefficient	+0.045%/C
Operating Temperature Range	-40~+85 C
Nominal Operating Cell Temperature	45 \pm 2 C

Current-Voltage & Power-Voltage Curves (SKT375M10)

